



Extractor

Bend from 28mm long strip of 5mm wide steel (2mm thick) to profile below





Top

The Box Tube MAC-11

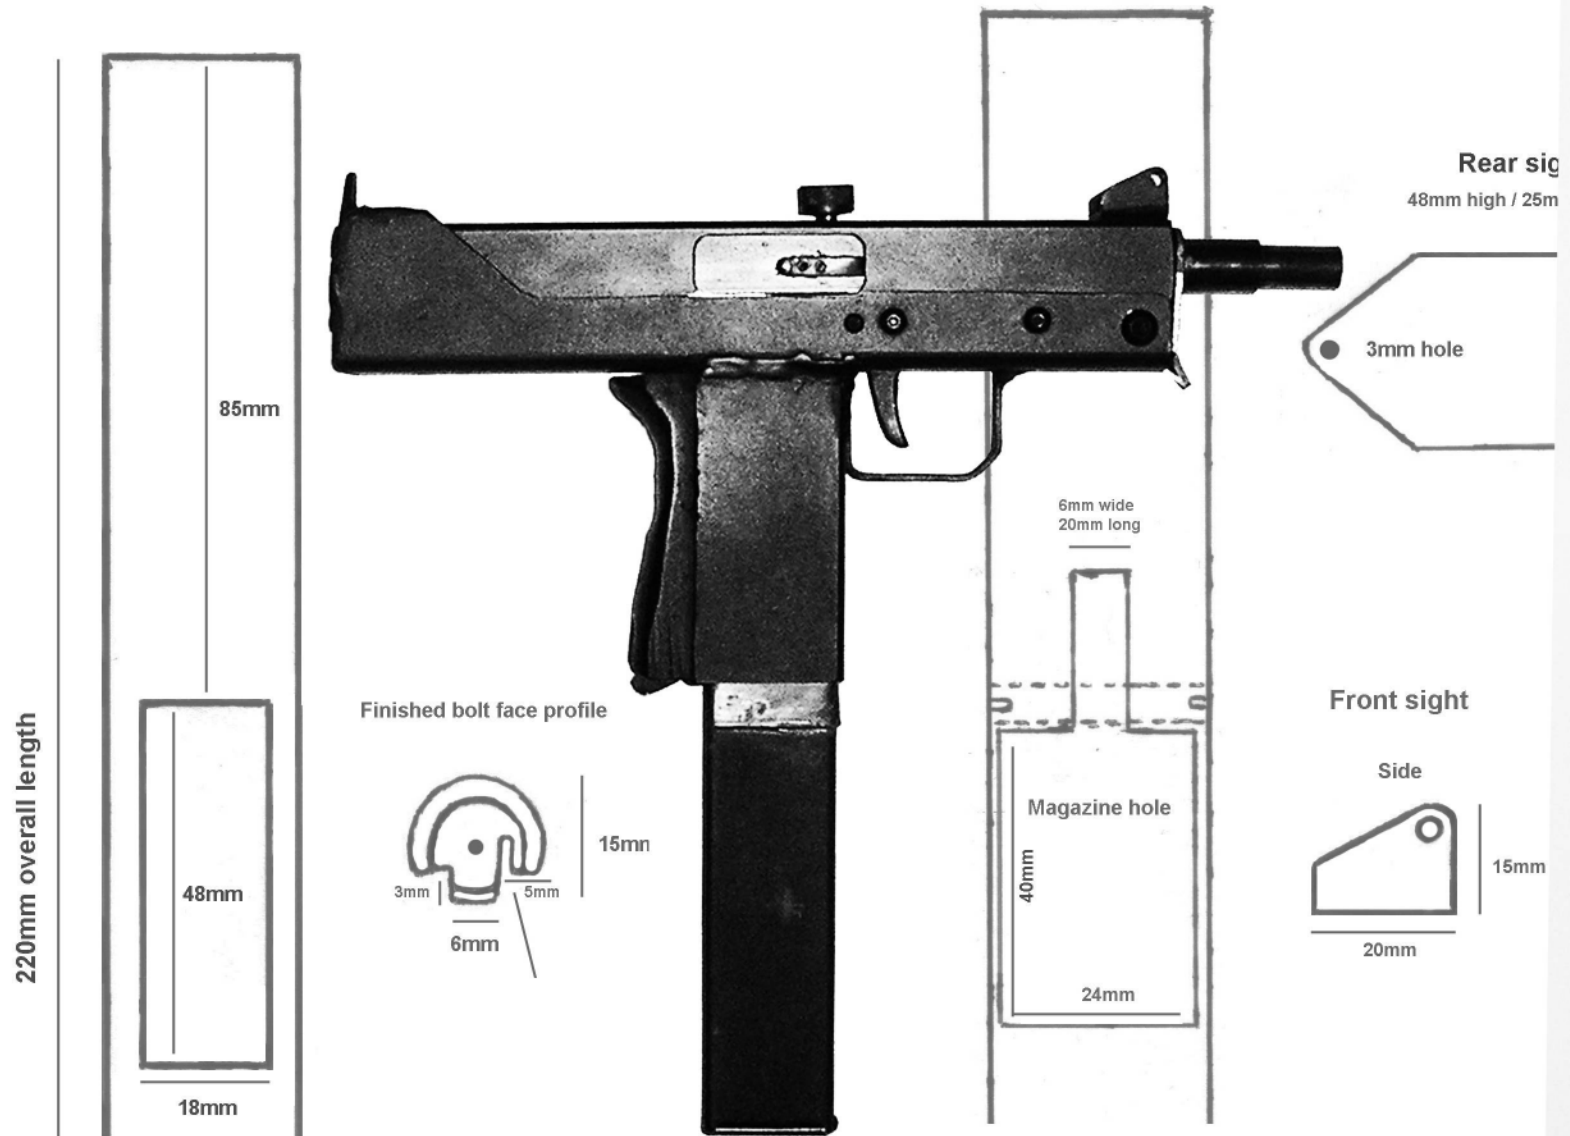

The Ultimate DIY Machine Pistol

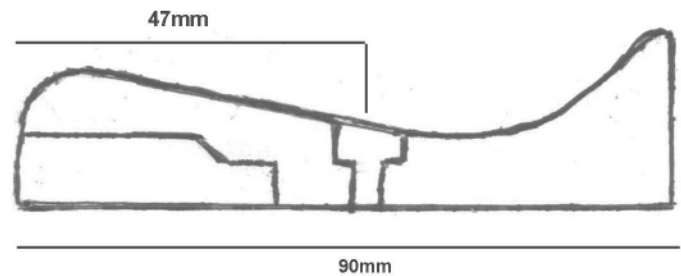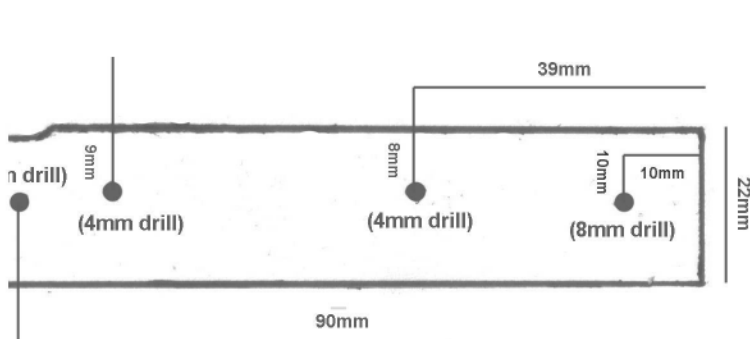

The Box Tube MAC-11

The Ultimate DIY Machine Pistol



Practical Scrap Metal Small Arms Vol.II

By Professor Parabellum

Plans on pages 15 to 20

Introduction

The machine pistol described here is perhaps the most compact of any homebuilt design publicized. In it's outward appearance it is an almost 1:1 clone of the M11-9, probably one of the most desired submachine guns in existence due to it's highly compact size and mainstream notoriety. It uses minimal parts and is as simple to construct as any typical homebuilt design, yet matches an original commercially made gun in looks, function and quality.



With the original weapon already having a highly refined receiver layout, the development stage focused solely on simplifying both the bolt and fire control mechanism to negate the use of a well equipped workshop for production, as cloning the original would require. The resulting weapon is externally identical in size to the original with the main differences being the method of constructing the bolt and it's fire control group consisting of two easily constructed components. Construction has also been simplified by using measurements in-line with the upper receiver, as is present on most open bolt submachine guns such as the STEN and Sterling. This negates having to offset the position of the breech face and barrel trunnion as replicating the original M11 would require. By altering the design in this manor, every component housed in it's upper receiver can be made by simply laminating two sizes of tubing and steel bar stock together.

Another 'get around' incorporated into this design is the simple two part assembly of it's wrap-around type bolt. This component is constructed by combining a section of 16mm steel bar stock fitted with a length of 30mm x 2mm steel box tube. By laminating in this very simple manor the need for a milling machine to mill the bolt from a single block of steel is eliminated.

*For legal purposes, the demonstration prototype shown in this publication was built as a legal non-firing dummy replica. It's dummy barrel is completely destroyed, blocked and permanently welded in place as well as it's bolt being built out of specification and having no provisions for a firing pin. Built In this manor It is not legally considered a firearm in most places. **This document is for academic study purposes only.***

Tools & construction techniques



Force PT110921 4-1/2-Inch Angle

\$19.99 from 3 stores

7.5 Amp, 11,000 rpm motor designed for fast material removal

An angle grinder – The Poor Man's Milling Machine

No expensive machine-shop tools are needed to construct the Box Tube MAC-11. Instead a number of very affordable tools can be used to the same effect. Equipped with a cheap angle grinder the average hobbyist has the ability to perform machining actions usually reserved for an expensive milling machine. Rather than tediously using a hacksaw to cut steel sheet, an angle grinder fitted with a 1mm slitting disc will accurately cut a straight line through steel of any thickness in mere seconds. Fitted with a 2mm disc it can be used to easily 'sculpt' thick steel into any shape in a fraction of the time it takes to manually use a hand file. Importantly for this project it is used to grind the magazine cuts in the bolt piece after which a hand file can be used to neaten the newly created 90 degree channels. This technique works surprisingly well and it's not unusual to get very neat right-angle cuts which look as though they were produced using a milling machine. One can manufacture almost any component of any weapon using this technique in very short order with very pleasing end results.



Small arc welders like the one above are available cheaply for purchase over the Internet



Force 1.1 Amp Rotary Tool Kit

\$13.98

★★★★★

The Force 1.1 Amp Rotary Tool Kit is an essential tool for homeowners and c

A rotary tool or dremel is highly useful for delicate grinding and cutting operations. Fitted with a 'reinforced cutting disc' it becomes a mini angle grinder, ideal for cutting out and grinding openings in pieces of tube quickly and neatly without having to manually use a hand file. These can be purchased cheaply online with a large variety of cutting, grinding and sanding bits available for working with metal.

With enough patience it is possible to construct every component described using only a drill, hacksaw, and a few hand files. However, for under \$100 you can purchase all the budget tools necessary to complete the project in only a couple of afternoons. It is well worth venturing to any 'swap meet', 'car boot sale' or 'flea market' as all tools mentioned can be found practically being given away in used condition.

Useful tools

Angle grinder

Hacksaw + cobalt tipped blades

Cobalt or titanium tipped drill bits

Drill press or hand drill combined with a stand

Welder

Dremel / rotary tool + reinforced cutting discs

Hand files

Materials

1" x 2" (50mm x 25mm x 1.5mm) mild steel box section

1" (25mm x 25mm x 2mm) mild steel box section

1 1/5" x 2" (30mm x 50mm x 2mm) mild steel box section

13/16" (20mm x 20mm x 2mm) mild steel box section

3/8" (10mm) thick aluminum or steel plate

14 gauge (2mm) mild steel plate

5/8" (16mm) round or square mild steel bar stock

m3, m4, m8 bolts

3/4" (18mm / 19mm diameter) compression spring

If excess tightness is encountered, square tubing can be reduced in OD slightly on each side by using an angle grinder fitted with a grinding or sanding disc.

Overview of components and their construction


Lower receiver



The lower receiver is cut out from an 11.6" / 295mm long length of 30mm x 50mm steel box section tube with a wall thickness of 2mm onto which the trigger group, rear support bar, magazine and front lug holes are made. The rear closure is bent to the specified dimensions and is welded in place with the rear sight plate welded over it. A 'U' shaped strip of 2mm sheet metal serves as a trigger guard and is welded in place. The rear support bar holds the upper receiver firmly in position with the rear closure portion of the lower receiver while the front lug holes allow it to be secured in place.



A section of 1/4" (6mm) thick aluminum or steel plate is cut to shape and serves as a feed ramp. It is secured in place by tapping it to accept two m3 bolts.

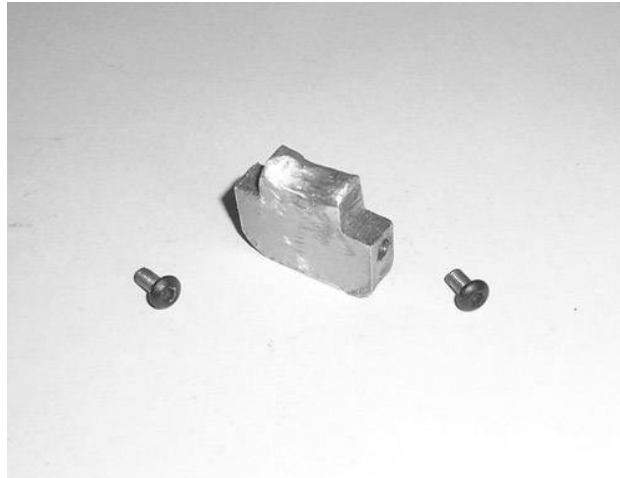


Upper receiver




The upper receiver is constructed from a length of 25mm square steel box section with a wall thickness of 2mm onto which the ejection port, cocking handle slot and lower opening sections are cut out. The best method to achieve this is to use a combination of drilling holes around the inside section to be cut out before cutting along the holes using a dremel type rotary tool fitted with a 'reinforced cutting disc'. These are extremely durable and can be used to neatly grind the edges to shape without having to use a hand file. If a dremel is unavailable, a hammer and a screw driver can be used to chisel out the drill hole lines after which a hand file can be used to file down the edges. A front lug made from a piece of the same 25mm box section is welded or bolted onto the lower front end and holds the upper receiver in place. This same material is also used for the construction of the front sight.

Barrel

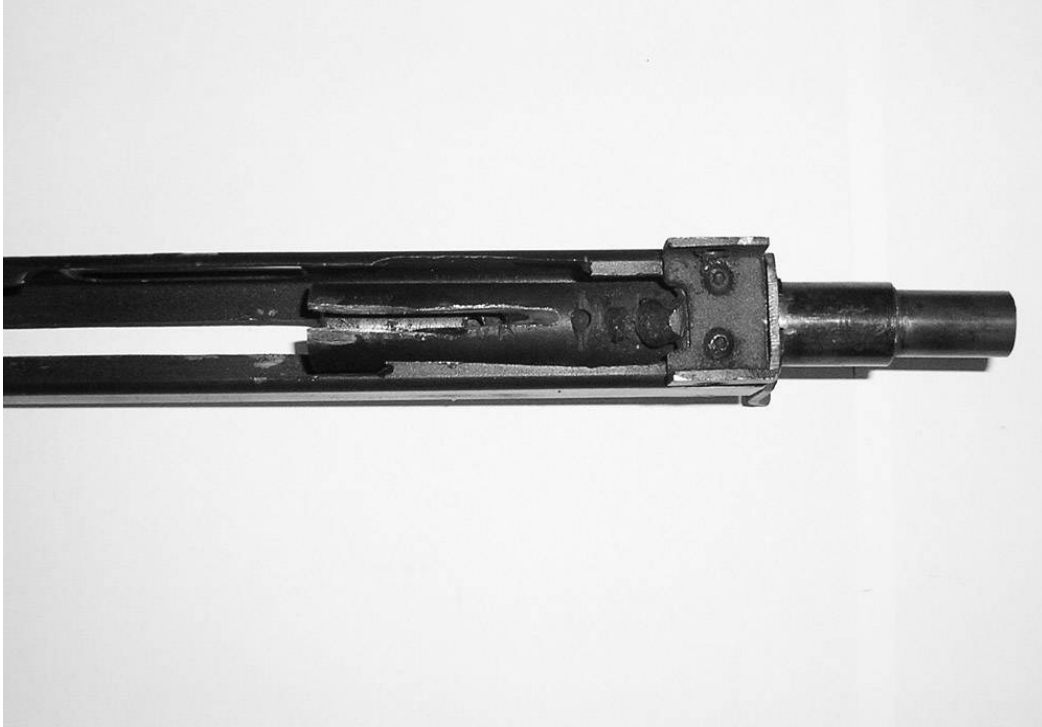


The demonstration model pictured was made with a non-functioning dummy barrel which is permanently destroyed (blocked by a hardened steel insert and cut open) and is welded in place. In this configuration it is not considered a firearm and can be legally owned and built freely as a display replica in most places.

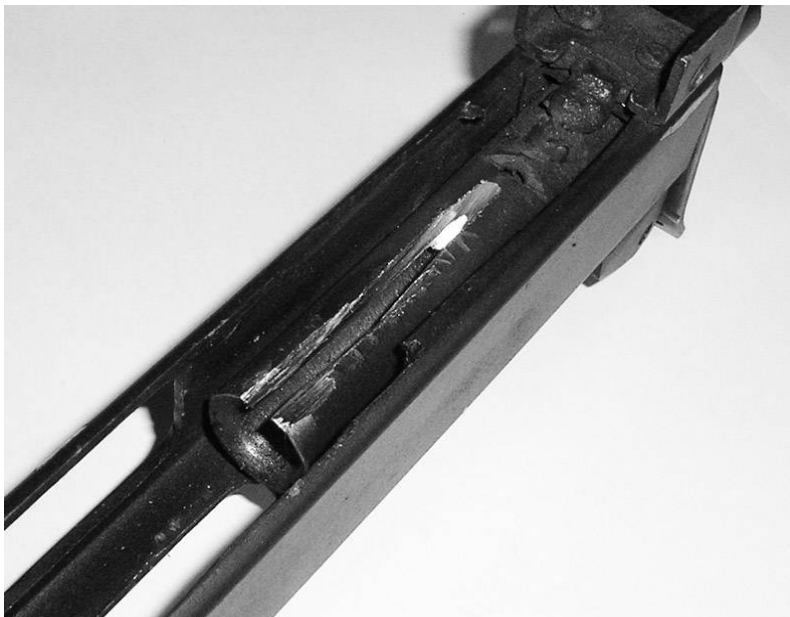

The outer dimension of the barrel is 5/8" (16mm). This fits tightly into a section of 20mm x 2mm round tube or square box section which serves as a collar to attach the barrel to the upper receiver. The barrel is secured in place either by welding or by means of a pin installed across the upper receiver as is present on the original MAC design.

Magazine-well

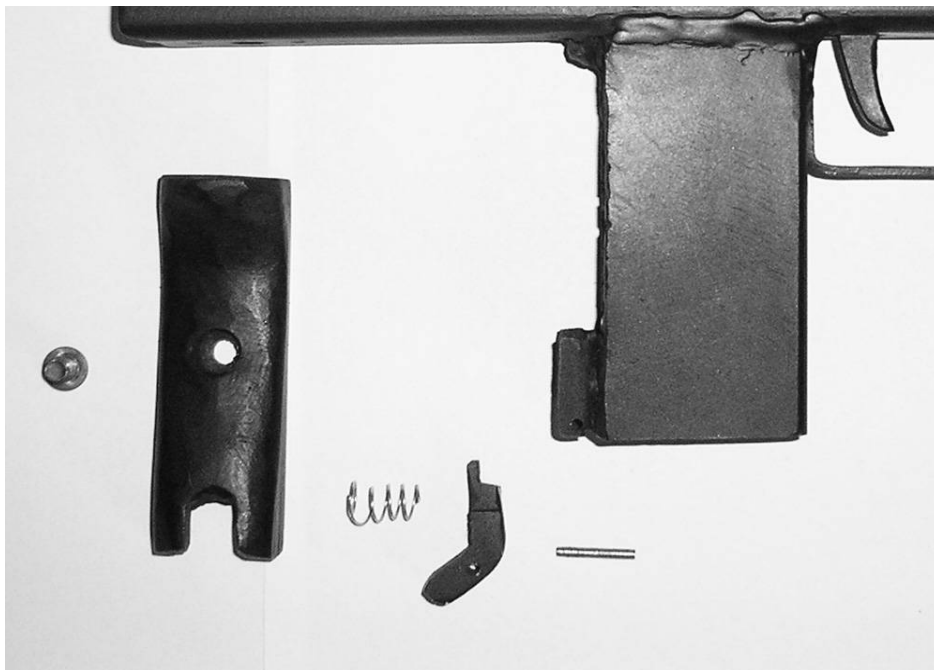


The magazine-well is made from a section of 1" x 2" (25mm x 50mm) steel rectangle tube shortened to 25mm x 43mm by removing, widening slightly, then re-welding one 25mm side to allow snug contact with the magazine. The magazine catch is cut out from 10mm aluminium plate, it's housing consisting of a small piece of bent steel sheet or rectangle section welded in place. The back grip piece is cut out from either wood or plastic and is drilled to accept an M5 bolt to attach it to the magazine well. Once completed the magazine-well is welded to the lower receiver. If a welder is unavailable, an alternative method would be to use an 'L' shaped piece of metal to secure the magazine-well to the bottom of the receiver using two short bolts.

The example shown uses a modified STEN magazine which has had the stop lips ground off and a new stopper attached. Alternatively, a homemade magazine constructed from 15mm x 35mm tube can be used. In this case a length of 20mm x 40mm steel tube with a wall thickness of 2mm is all that is required for it's magazine-well. A magazine-catch can be as simple as a length of handsaw blade combined with a modified nut and bolt.


Bolt



For legal purposes, the bolt on the demonstration model was made without provisions for a firing pin and can only feed dummy inert rounds. Rather than milling a bolt from a single block of steel, it is constructed by inserting a length of 16mm round or square steel bar into a length of 20mm steel square box section with a wall thickness of 2mm, the same material used for the barrel collar. The breech face of the bolt piece is first drilled 3mm deep using a 10mm drill bit and then levelled flat using the same size drill bit with it's tip removed. The feeding cuts for the magazine are formed using an angle grinder fitted with a 2mm or 3mm grinding disc after which it is hand finished using a file. The ejector slot is cut using a 1mm slitting disc until the ejector itself slides in and out without resistance. The finished 'dummy' bolt is retained in place using a number of steel rods, grub screws or beheaded bolts threaded in place. Additional weight can be added by drilling out and inserting tungsten bars or partially filling the back of the bolt with lead. To ensure positive engagement with the sear, the contact point at the front of the bolt carrier can be increased in width using a welder and then filed to shape.

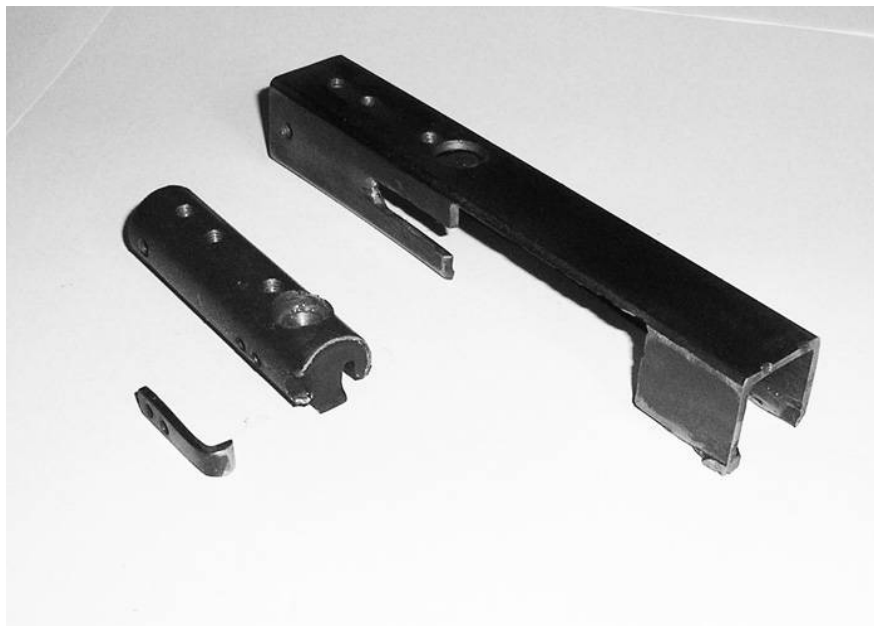

Angle grinder milling:

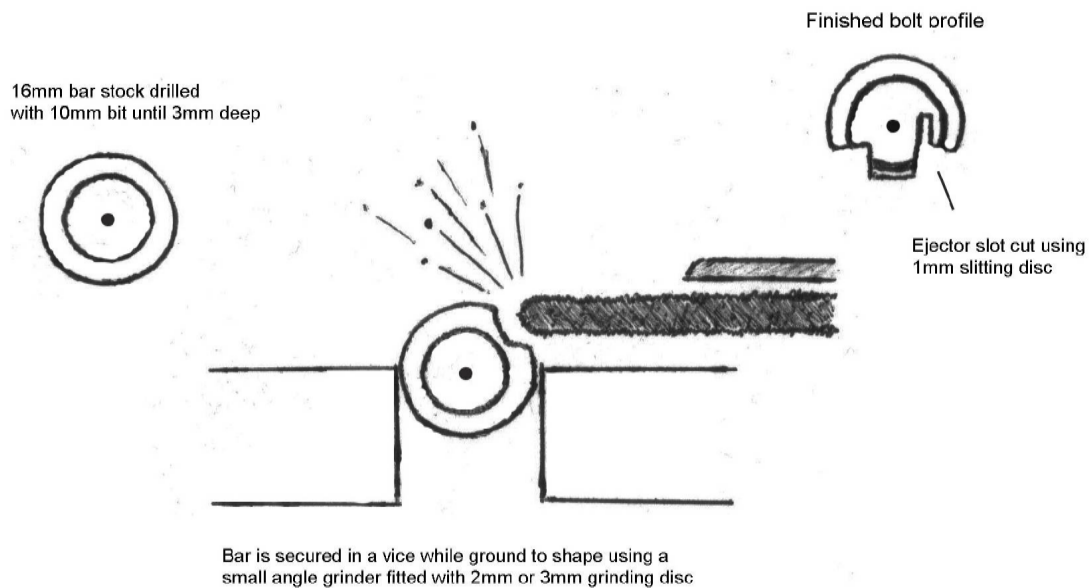


Extractor



This machine pistol uses a fixed, spring-less extractor. Adding an extractor to a blowback design is usually optional, though the simplicity of this design hardly justifies leaving it out. In this case, it is simply a strip of 2mm sheet steel bent at a right-angle and filed into a simple claw profile after which it is then attached to the bolt via two m3 or m4 grub screws. Once confirmed functioning of the finished extractor claw is established it can be hardened by heating until red then quenching in a solution of salt water. The extractor claw should be made fairly undersized so as to allow a cartridge rim to easily slide into contact with it without interfering with feeding.

Ejector

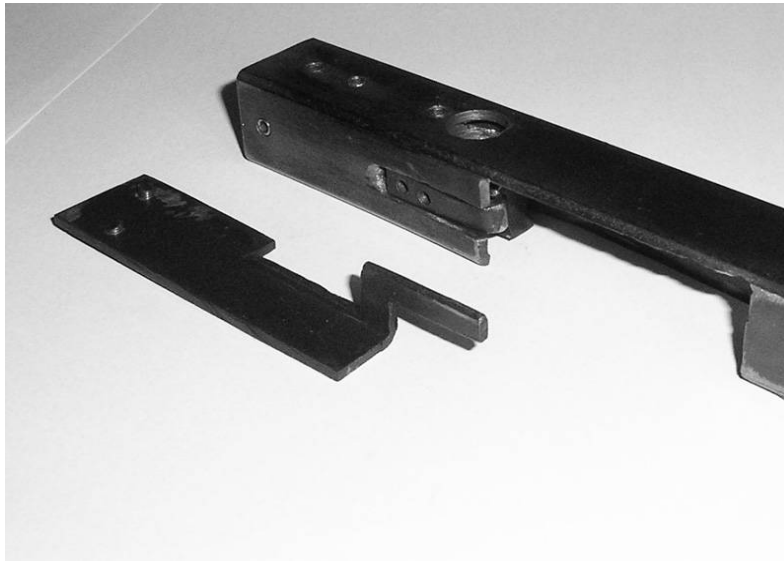


The ejector consists of a plate bolted onto the bottom of the upper receiver, its contact arm slotting up 90 degrees into line with the bolt's ejector channel. It is fabricated from a single piece of 2mm thick sheet steel. The plans provided contain a smaller simplified version.



Trigger group



The trigger group consists of two pieces of modified 10mm thick aluminum or steel plate. The trigger is cut to the dimensions specified while the flat sear piece is cut out and fitted with a modified section of hardened/stainless steel bolt ground to its required profile. This part makes contact with the front of the bolt carrier under spring tension, preventing it from moving forward until the trigger is pulled. A suitable sear spring can be obtained from a hand sanitizer or shampoo bottle.

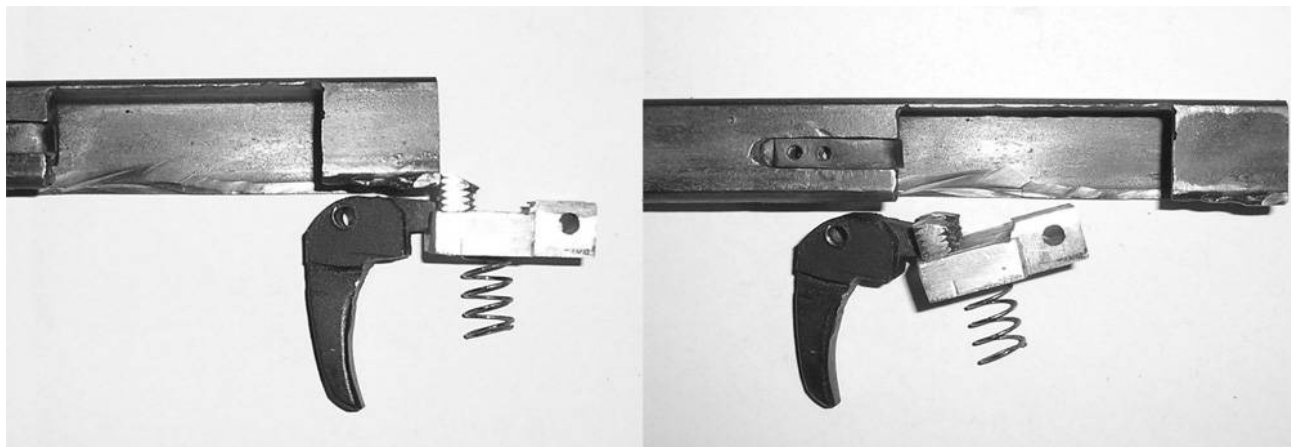

Left: Cocked position – ready to fire. Right: Closed position – round chambered and fired

Recoil spring

Due to the small inner dimensions of the upper receiver, suitable compression springs are readily available for purchase online. A compression spring around 120mm (4 3/4") in length, 18mm (- 3/4") in outer diameter and wound from 15 gauge wire is desired. As long as a spring firmly holds the bolt closed and can be cocked back with a smooth and consistent pull, it will likely be suitable.

Magazine

The demonstration model uses 9mm STEN magazines which have been modified by removing the original stopper tabs and instead fabricating a new stopper and catch notch. The magazine-well can optionally be slotted and the mag-catch increased in length to accept original unmodified STEN magazines. Plans for a homebuilt magazine have also been provided.


Finishing

Once completed the pistol can be stripped down and splayed with two to three coats of matt black High Temperature Engine Enamel. This type of finish usually requires no priming or preparation and is many times more durable than standard auto or BBQ paint.

Plans

All pages included should be printed out on 8.5 x 11 US letter paper. Each component template is drawn to scale and can be cut out and glued to their respective thickness of material. Make sure the ruler at the bottom left of each sheet is 2 inches in length. Alternatively, enlarge the plans using a computer program until the ruler is the correct length, then trace the parts needed onto a sheet of paper taped over your computer's screen.

Upper receiver

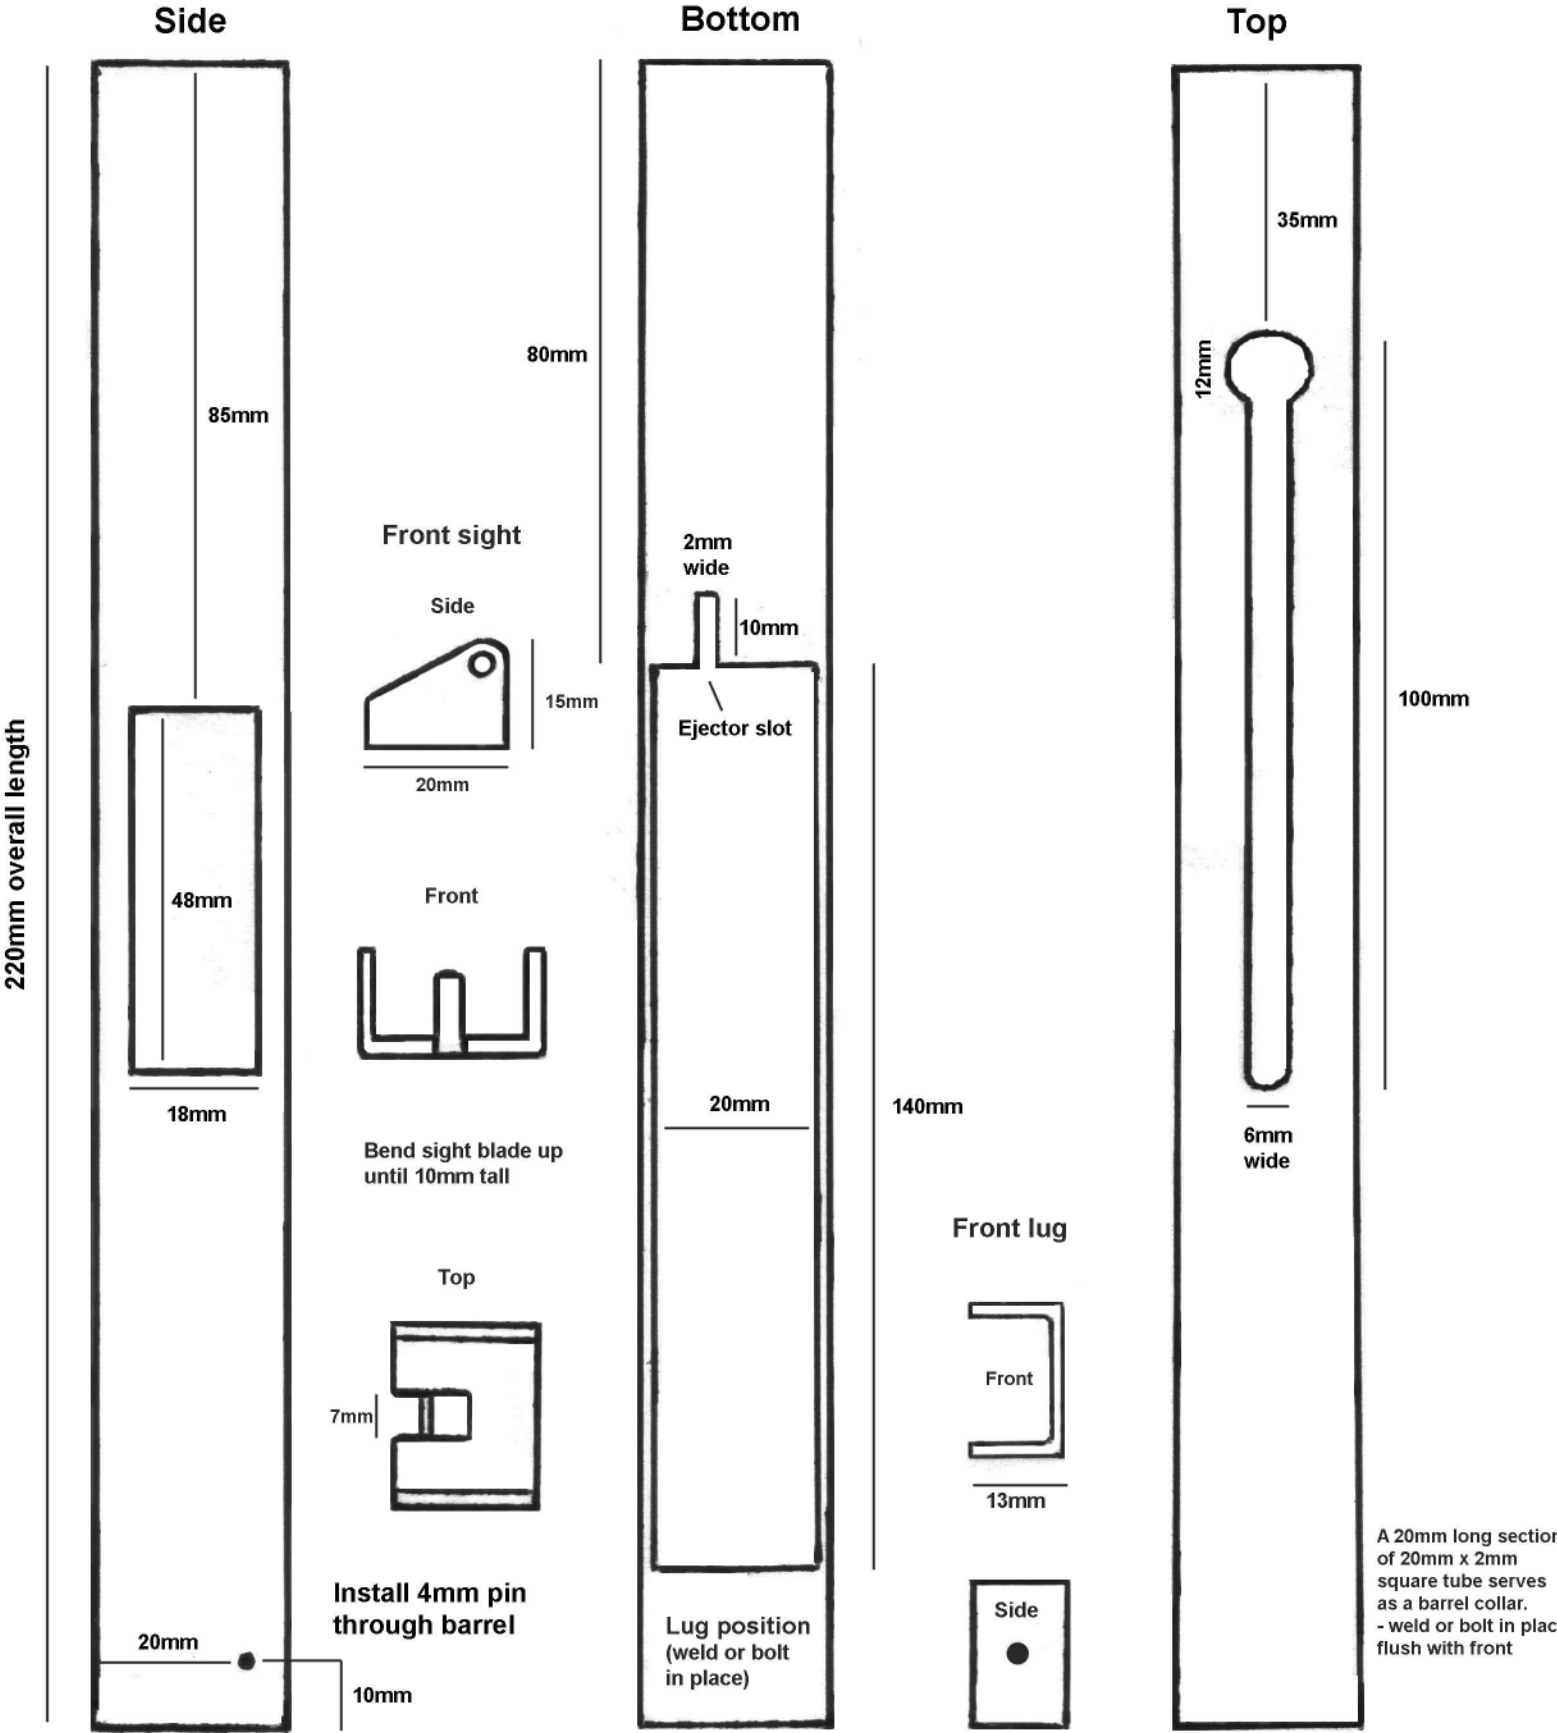


2 inches

Cut lug from 25mm box tube
- Drill with 7mm bit and tap to accept two m8 bolts


Lower receiver

The Box Tube MAC-11 - The Ultimate DIY Machine Pistol

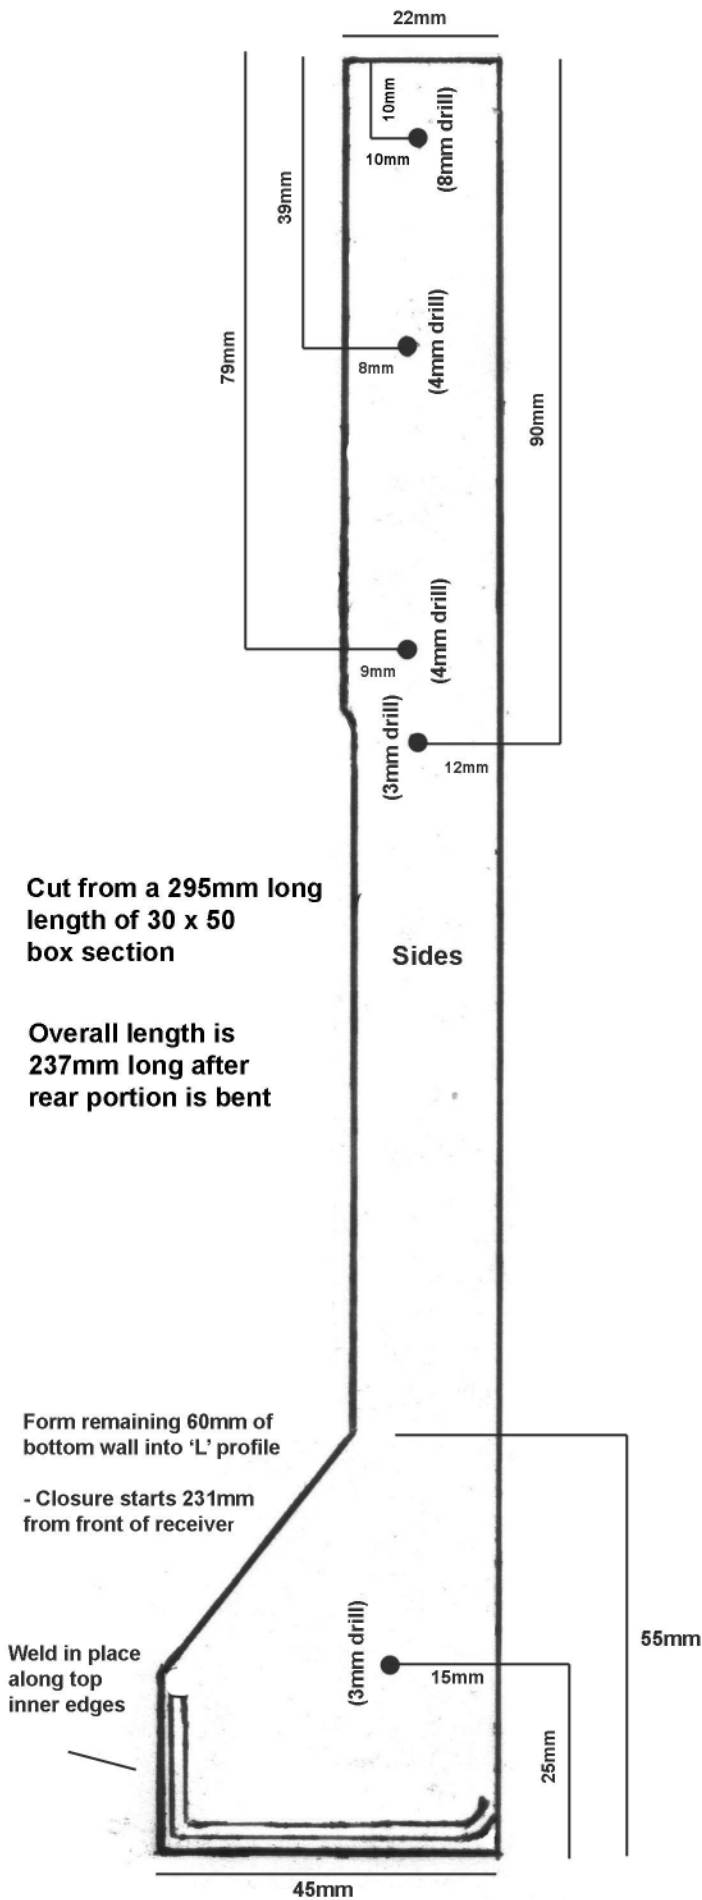


Trigger guard

Bend from 100mm long steel strip to profile



Feed ramp


Position of feed ramp

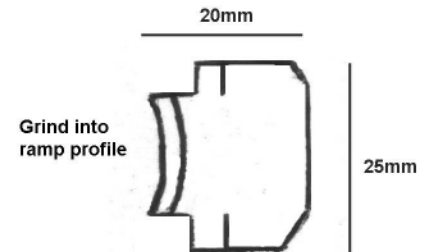

Attach to lower receiver using two m3 bolts through both sides

Rear sight

48mm high / 25mm wide

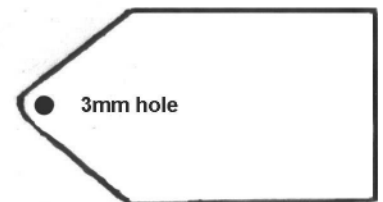


Position sight 15mm up from bottom of lower receiver - weld in place along sides

2 inches


Print on 8.5x11 US letter paper

Lower receiver: 30mm x 50mm (2mm wall) mild steel box section
Rear sight & trigger guard: 14 gauge (2mm) mild steel sheet
Feed ramp: 1/4" (6mm) thick steel or aluminum plate

Magazine well

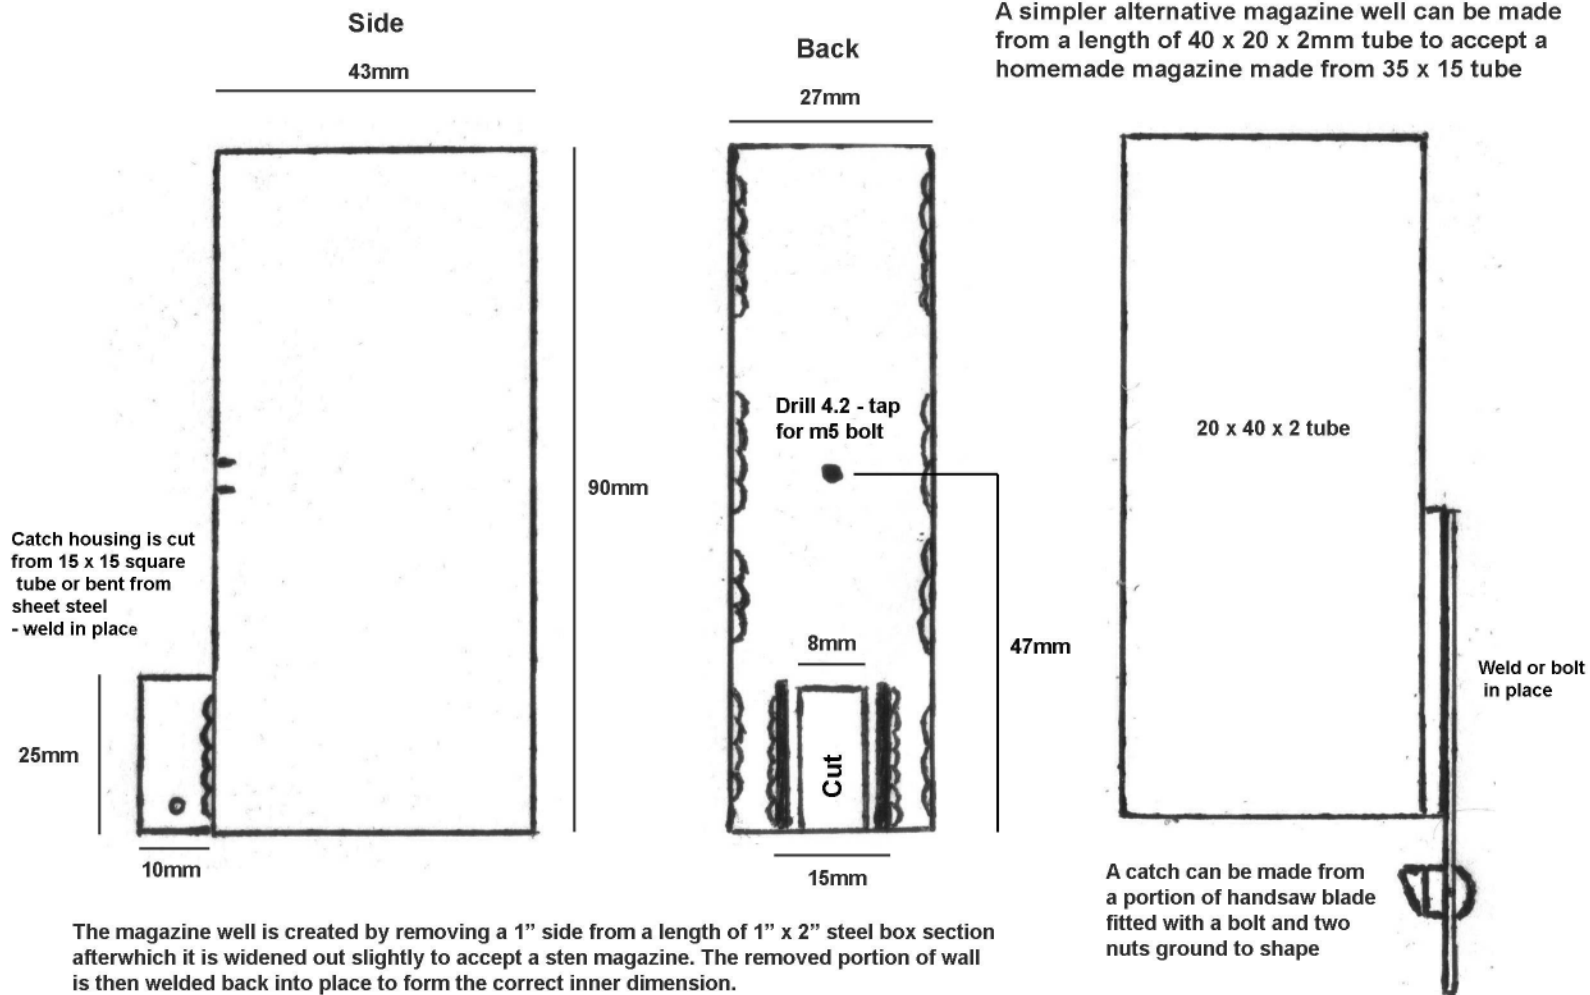


Mag catch



Secure with 15mm long pin

Grip

1" thick wood or plastic

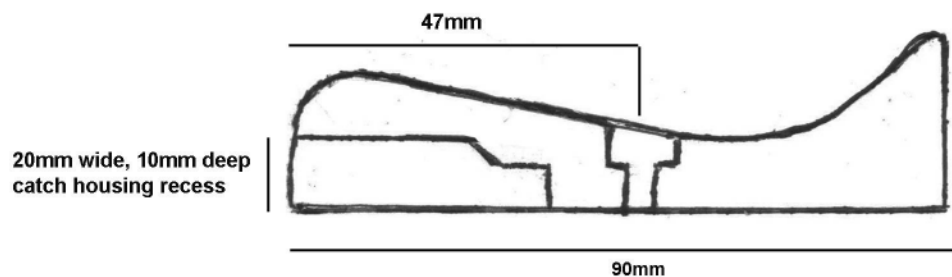

2 inches


Print on 8.5x11 US letter paper

Sten magazine well : 1" x 2" (50 x 25 x 1.5mm) steel box section
 Catch housing : 16 gauge (1.5mm) sheet or suitable steel box section
 Magazine catch : 3/8" (10mm) steel or aluminum plate

Bolt


Bolt carrier

Cut from a 129mm length of 20mm x 20mm (2mm wall) steel box tube
Cut out lower wall

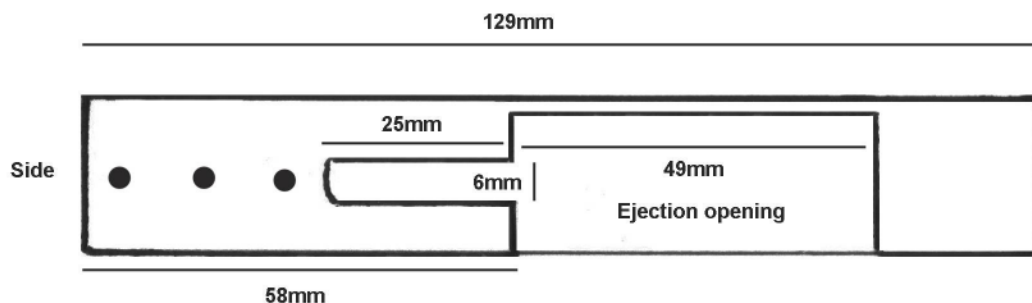

Leave 5mm of lower wall material on front edges to ensure positive contact with sear

Mount bolt piece using three 6mm mild steel bars or weld in place

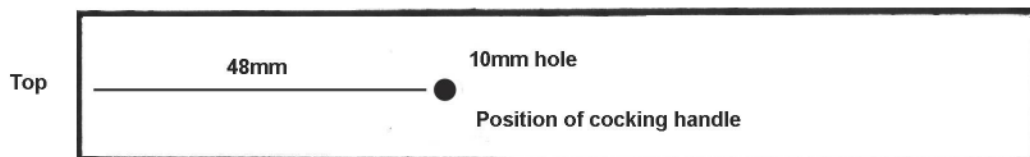

Bolt handle

Modified m10 bolt
(grind down upper 5mm)



Alternatively tap bolt carrier to accept an unmodified m6 bolt


Bolt piece

Cut from a 58mm length of 5/8" (16mm) steel bar stock



- Drill center with 10mm drill bit until 3mm deep
- Grind flat with 10mm drill bit with tip removed using angle grinder
- Bevel edges slightly with 16mm+ drill bit or dremel

Finished bolt face profile



Grind feeding cuts using angle grinder fitted with 2mm grinding disc for entire 58mm length.

Cut ejection slot using angle grinder fitted with 1mm slitting disc until 7mm deep. Widen if necessary.

Extractor

Bend from 28mm long strip of 5mm wide steel (2mm thick) to profile below



2 inches


Print on 8.5x11 US letter paper

Bolt carrier: 20 x 20 (2mm wall) mild steel square box section
Bolt piece: 5/8" (16mm) round or square mild steel bar stock
Extractor: 14 gauge (2mm) steel sheet


Trigger group & ejector

Cut trigger and sear from 10mm thick aluminum or steel plate


Trigger

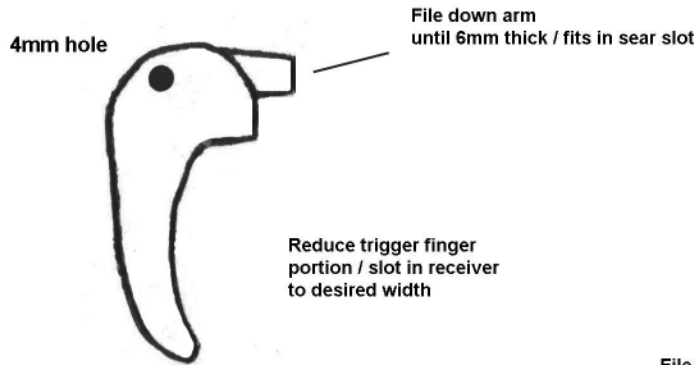

Finished trigger group

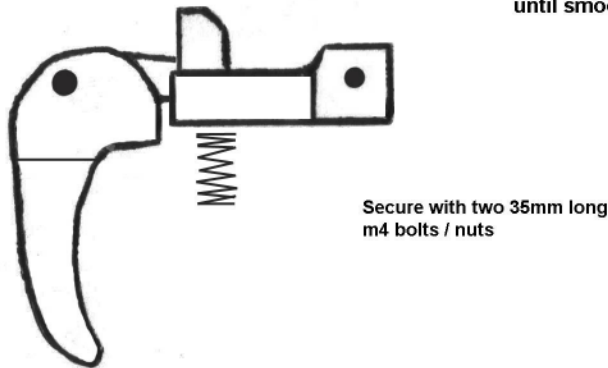


Ejector

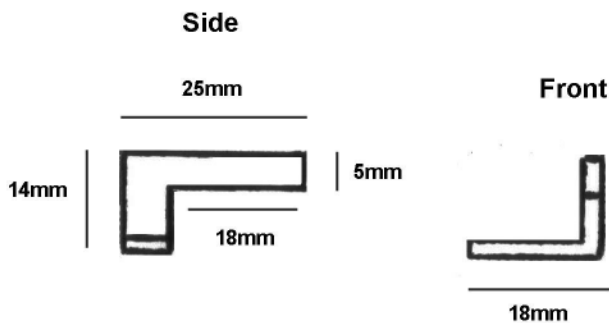

Bend from 2mm steel sheet

Sear

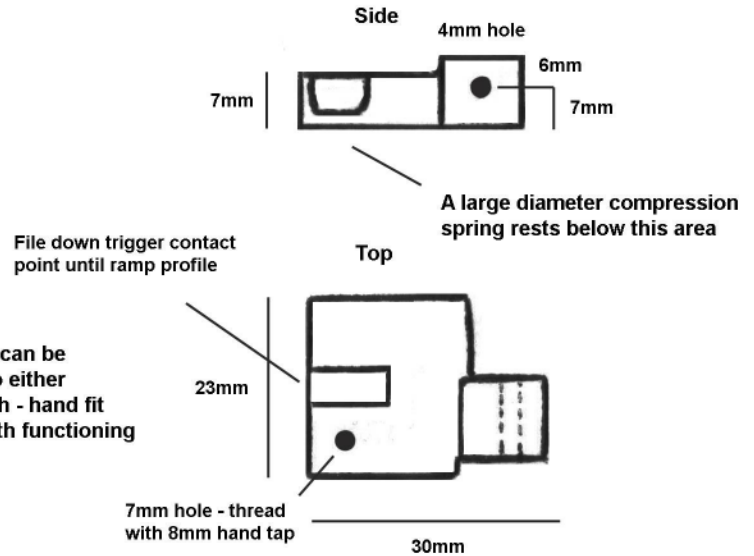

Tap hole with m8 bolt for sear tooth
- cut off excess and grind to required profile

Finished ejector profile



2 inches

Print on 8.5x11 US letter paper


Trigger and sear: 10mm thick aluminum or steel plate
Ejector: 14 gauge (2mm) thick mild steel sheet

Barrel and magazine

Barrel


(Non-functioning dummy)

135mm

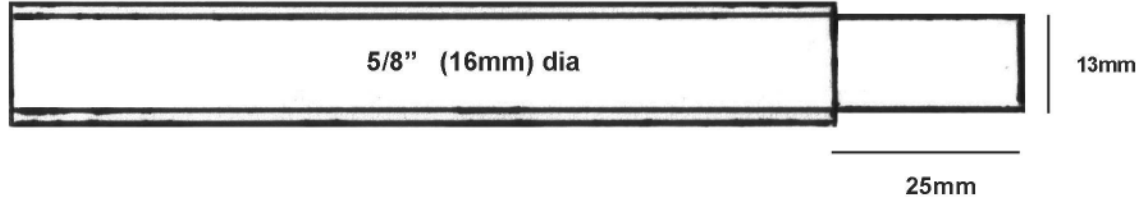


Sling / hand strap mount

Weld in place or attach via circlip

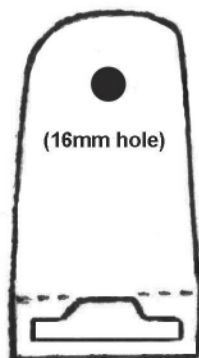

Follower

Bend from 90mm long
10mm wide metal strip



2 inches

File to ramp
shape

111mm

Cut 6mm

Homebuilt magazine

35mm x 15mm tube
7" long

Bend lips inwards
until 9mm across

Secure with 2 pins and a
12mm x 32mm steel strip

90mm long, 12mm wide
steel strip - bend and
epoxy or silver solder
in place

18mm long section
of 5mm steel bar
or bolt - epoxy or
silver solder into rib

Wind 20 gauge spring
steel wire around a 15" long
24mm x 8mm bar to form
magazine spring.

- Leave 15mm between
each turn until
12" in length.

STEN magazine modifications

116mm
(New mag-stop
placement)

Remove
stop tabs

You might also want to take a look at ...

